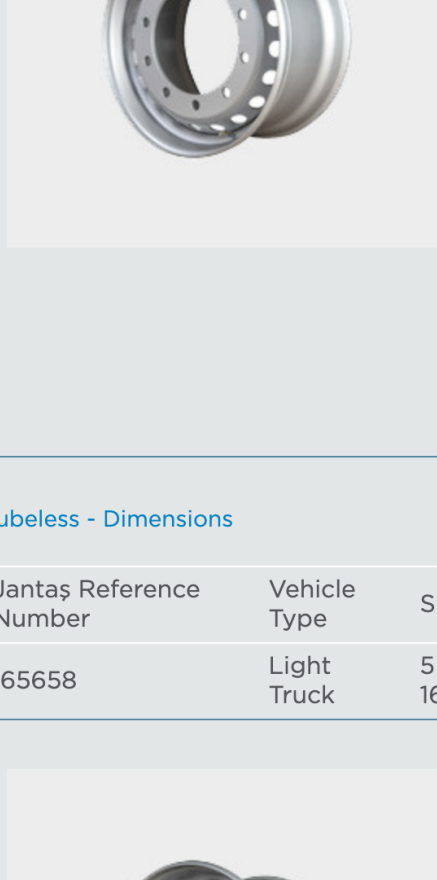
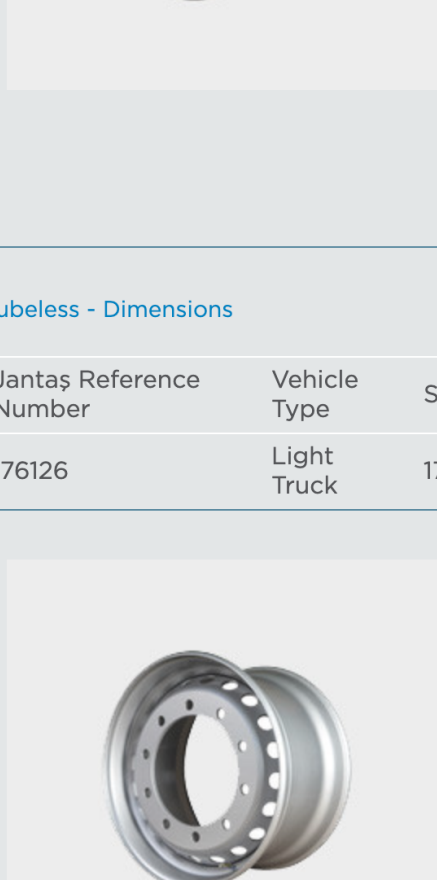


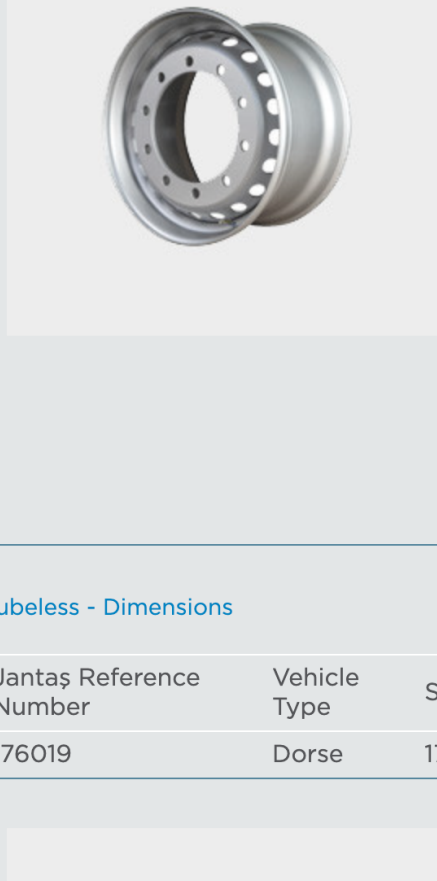
TUBELESS WHEELS S

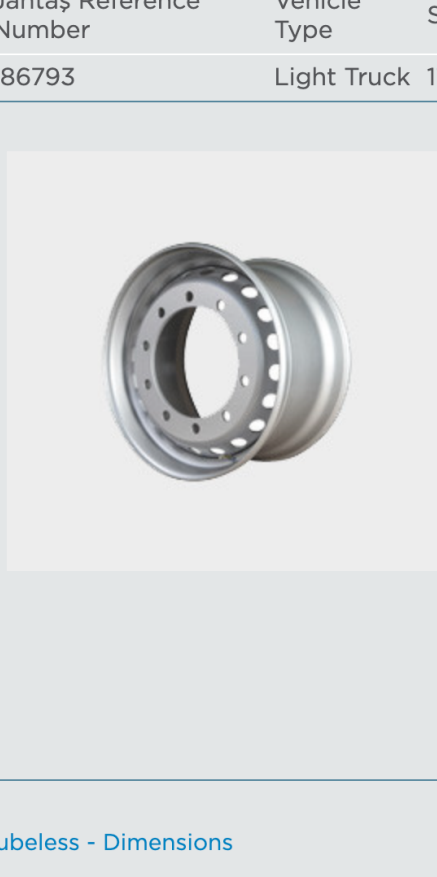
Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
165509	Light Truck	5 ½ JK x 16H	208	150	5	106,5	32,5	8,5
					Additional Details			
					Recommended Valve : TR602			
					Load Capacity (Kg): 1250			
					Used For : Hyundai			
					Stud Hole type : B19 DS 44			
					Type of stud hole : Conic			
					Wheel Type : (BZ)			
					Tubeless : 195/75 R 16C			
CONTACT FOR MORE INFORMATION								

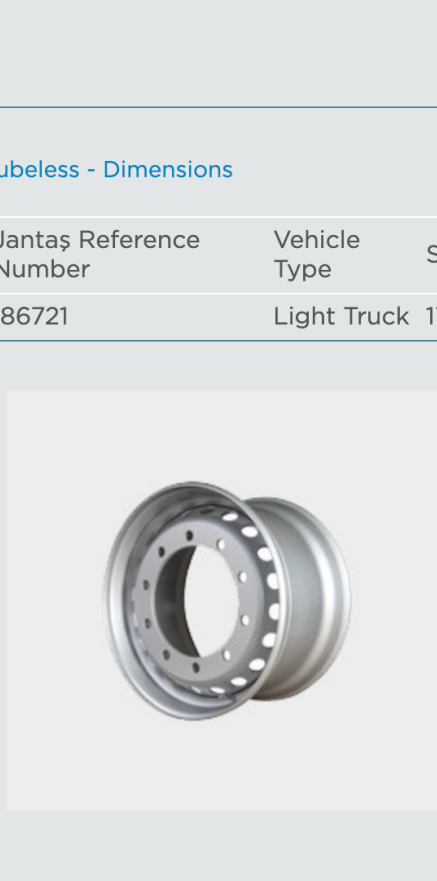
Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
165658	Light Truck	5 ½ JK x 16H	170	130	6	106	21	7,2
					Additional Details			
					Recommended Valve : V0-04-1			
					Load Capacity (Kg): 1000			
					Used For : Gazelle			
					Stud Hole type : M18			
					Type of stud hole : Flat			
					Wheel Type : MZ			
					Tubeless : 195/75 R 16C			
CONTACT FOR MORE INFORMATION								

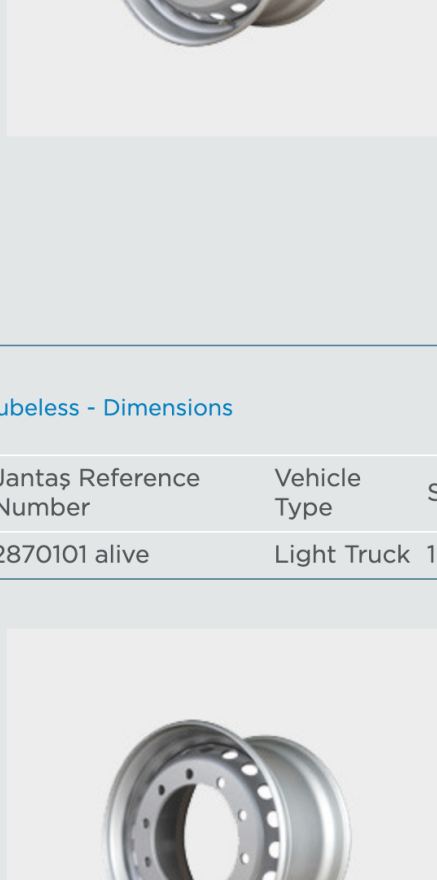
Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
166092	Light Truck	6 K x 16H2	205	161	6	118	21,5	9
					Additional Details			
					Recommended Valve : V3-20-1			
					Load Capacity (Kg): 1450			
					Used For : Various			
					Stud Hole type : M18 DS 32			
					Type of stud hole : Conic			
					Wheel Type : (MZ)			
					Tubeless : 215/75 R 16C			
CONTACT FOR MORE INFORMATION								

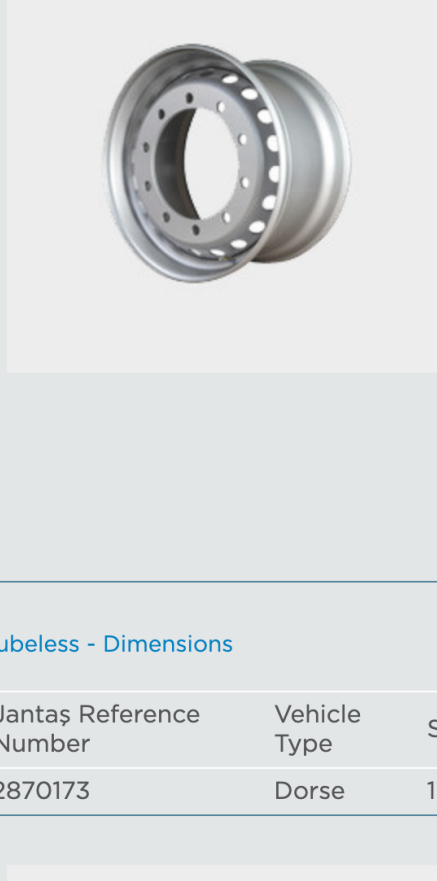
Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
2870140	Light Truck	17.5x5.25	208	150	5	107	32,5	8
					Additional Details			
					Recommended Valve : V3-20-4			
					Used For : Various			
					Stud Hole type : B19 DS 44			
					Type of stud hole : Conic			
					Wheel Type : (MZ)			
					Tubeless : 8.5 R 17.5			
CONTACT FOR MORE INFORMATION								

Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
175260	Light Truck	17.5x5.25	208	150	5	107	32,5	8
					Additional Details			
					Recommended Valve : V3-20-4			
					Used For : Various			
					Stud Hole type : B19 DS 44			
					Type of stud hole : Conic			
					Wheel Type : (MZ)			
					Tubeless : 8.5 R 17.5			
CONTACT FOR MORE INFORMATION								

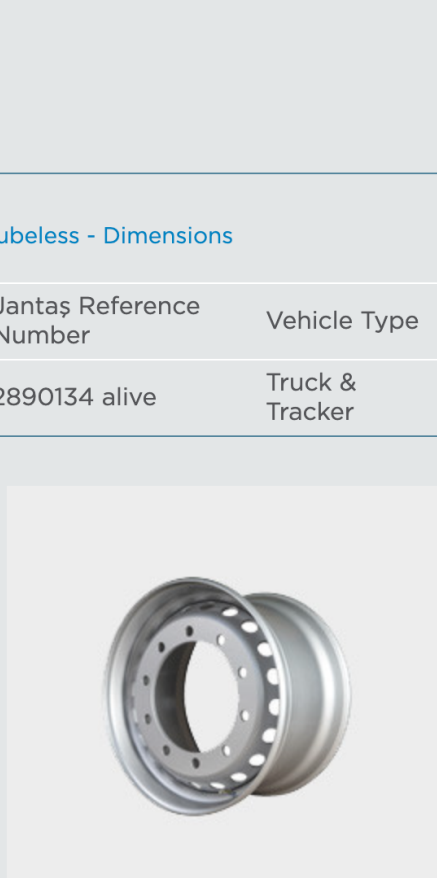
Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
185217	Light Truck	17.5x5.25	205	161	6	120	21	10
					Additional Details			
					Recommended Valve : V3-20-4			
					Load Capacity (Kg): 1550			
					Used For : Various			
					Stud Hole type : M18			
					Type of stud hole : Flat			
					Wheel Type : MZ			
					Tubeless : 8.5 R 17.5			
CONTACT FOR MORE INFORMATION								

Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
186044	Light Truck	17.5x6.00	205	146	5	115	29	10
					Additional Details			
					Recommended Valve : V3-20-4			
					Load Capacity (Kg): 1850			
					Used For : ISUZU			
					Stud Hole type : B24 DS 44			
					Wheel Type : BZ			
					Tubeless : 9.5 R 17.5			
CONTACT FOR MORE INFORMATION								

Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
176126	Light Truck	17.5x6.00	222,25	164	6	118	32,5	9
					Additional Details			
					Recommended Valve : V3-20-4			
					Load Capacity (Kg): 1850			
					Used For : Various			
					Stud Hole type : B19 DS 44			
					Type of stud hole : Conic			
					Wheel Type : BZ			
					Tubeless : 9.5 R 17.5			
CONTACT FOR MORE INFORMATION								

Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
186021	Light Truck	17.5x6.00	222,25	164	6	126	32,5	9
					Additional Details			
					Recommended Valve : V3-20-4			
					Load Capacity (Kg): 1850			
					Used For : Various			
					Stud Hole type : B19 DS 44			
					Type of stud hole : Conic			
					Wheel Type : BZ			
					Tubeless : 9.5 R 17.5			
CONTACT FOR MORE INFORMATION								

Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
176019	Dorset	17.5x6.00	225	176	10	122,5	26	12,5
					Additional Details			
					Recommended Valve : V3-20-4			
					Load Capacity (Kg): 2725			
					Used For : Trailer			
					Stud Hole type : M22			
					Type of stud hole : Flat			
					Wheel Type : MZ			
					Tubeless : 9.5 R 17.5			
CONTACT FOR MORE INFORMATION								

Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
186793	Light Truck	17.5x6.75	205	161	6	129,5	21,5	10
					Additional Details			
					Recommended Valve : V3-20-4			
					Load Capacity (Kg): 1900			
					Used For : Various			
					Stud Hole type : M18 DS 32			
					Type of stud hole : Conic			
					Wheel Type : (MZ)			
					Tubeless : 9.5 R 17.5			
CONTACT FOR MORE INFORMATION								

2890134	alive	Truck Tracker	19.5x6.75	275	221	8	134	24	11
---------	-------	------------------	-----------	-----	-----	---	-----	----	----



Additional Details

Recommended Valve : V3-22-1

Load Capacity (Kg) : 2500

Used For : ISUZU

Stud Hole type : M20

Type of stud hole : Flat

Wheel Type : MZ

Tubeless : 265/70 R 19.5

[CONTACT FOR MORE INFORMATION](#)

Tubeless - Dimensions									KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness	
196718	alive	Truck & Tracker	19.5x6.75	275	221	8	135	24	12



Additional Details

Recommended Valve : V3-22-1

Load Capacity (Kg) : 2500

Used For : UD Truck

Stud Hole type : M20

Type of stud hole : Flat

Wheel Type : MZ

Load Capacity (Kg) : 6000
Used For : Various
Stud Hole type : M22
Type of stud hole : Flat
Wheel Type : MZ
Tubeless : 455/55 R 22.5

[CONTACT FOR MORE INFORMATION](#)

Tubeless - Dimensions

KAPAT -

Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud Hole Diameter	Disc Thickness
2920656 alive	Dorse	22.5x14.00	335	281	8	26	13	

Additional Details

Recommended
17.00.1



Valve : V3-22-1

Load Capacity (Kg) : 5600

Used For : Trailer

Stud Hole type : M22

Type of stud hole : Flat

Wheel Type : MZ

Tubeless : 455/55 R 22.5

CONTACT FOR MORE INFORMATION

Tubeless - Dimensions

KAPAT -

Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
2920655 alive	Dorse	22.5x14.00	335	281	10		26	13



Additional Details

Recommended Valve : V3-22-1

Load Capacity (Kg) : 5600

Used For : Trailer

Stud Hole type : M22 ES 36

Type of stud hole : Conic

Wheel Type : (MZ)

Tubeless : 455/55 R 22.5

CONTACT FOR MORE INFORMATION

Tubeless - Dimensions

KAPAT -

Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
2920817 alive	Dorse	22.5x11.75	335	281	10		26	11,65

Additional Details

Recommended Valve	: V3-22-1
Load Capacity (Kg)	: 5000
Used For	: Trailer
Stud Hole type	: M22
Type of stud hole	: Flat
Wheel Type	: MZ
Tubeless	: 385/65 R 22.5

[CONTACT FOR MORE INFORMATION](#)

Tubeless - Dimensions

[KAPAT -](#)

Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
2920639 alive	Dorse	22.5x11.75	335	281	10	120	26	15

Additional Details

Recommended Valve	: V3-22-1
Load Capacity (Kg)	: 5000
Used For	: Various
Stud Hole type	: M22
Type of stud hole	: Flat
Wheel Type	: MZ
Tubeless	: 385/65 R 22.5

[CONTACT FOR MORE INFORMATION](#)

Tubeless - Dimensions

[KAPAT -](#)

Jantas Reference	Vehicle Type	Size	Pitch	Center	Stud	Offset	Stud hole	Disc
------------------	--------------	------	-------	--------	------	--------	-----------	------

Number	Vehicle Type	Size	Circle	Bore	Stud Hole	Offset	Diameter	Thickness
2920806 alive	Truck & Tracker	22.5x9.00	335	281	10	162	26	13



Additional Details

Recommended Valve

: V3-22-1

Load Capacity (Kg)

: 4000

Used For

: Daimler

Stud Hole type

: M22

Type of stud hole

: Flat

Wheel Type

: MZ

Tubeless

: 315/80 R 22.5

CONTACT FOR MORE INFORMATION

Tubeless - Dimensions								
KAPAT -								
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
229155-S	Truck & Tracker	22.5x9.00	335	281	10	161	27	16



Additional Details

Recommended Valve

: V3-20-6

Load Capacity (Kg)

: 6000

Used For

: Various

Stud Hole type

: B22 DS 36

Type of stud hole

: Conic

Wheel Type

: BZ

Tubeless

: 315/80 R 22.5

CONTACT FOR MORE INFORMATION

Tubeless - Dimensions									KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness	
229154-S	Truck & Tracker	22.5x9.00	335	281	10	161	26	16	
					Additional Details				
					Recommended Valve : V3-20-6				
					Load Capacity (Kg) : 6000				
					Used For : Various				
					Stud Hole type : M22				
					Type of stud hole : Flat				
					Wheel Type : MZ				
					Tubeless : 315/80 R 22.5				
CONTACT FOR MORE INFORMATION									

Tubeless - Dimensions									KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness	
229204	Truck & Tracker	22.5x9.00	335	281	10	161	27	14	
					Additional Details				
					Recommended Valve : V3-20-6				
					Load Capacity (Kg) : 4000				
					Used For : Various				
					Stud Hole type : B22 DS 36				
					Type of stud hole : Conic				
					Wheel Type : BZ				
					Tubeless : 315/80 R 22.5				

Tubeless - Dimensions									KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness	
229202	Truck & Tracker	22.5x9.00	335	281	10	161	26	14	
					Additional Details				
					Recommended Valve : V3-20-6				
					Load Capacity (Kg) : 4000				
					Used For : Various				
					Stud Hole type : M22				
					Type of stud hole : Flat				
					Wheel Type : MZ				
					Tubeless : 315/80 R 22.5				
									CONTACT FOR MORE INFORMATION

Tubeless - Dimensions									KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness	
229046	Truck & Tracker	22.5x9.00	335	281	10	105	26	13	
					Additional Details				
					Recommended Valve : V3-20-4				
					Load Capacity (Kg) : 4000				
					Used For : Mercedes Truck				
					Stud Hole type : M22				
					Type of stud hole : Flat				
					Wheel Type : MZ				
									CONTACT FOR MORE INFORMATION



Stud Hole type : M22

Type of stud hole : Flat

Wheel Type : MZ

Tubeless : 315/80 R 22.5

CONTACT FOR MORE INFORMATION

Tubeless - Dimensions

KAPAT -

Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
228350	Bus	22.5x8.25	335	281	10	152	27	13



Additional Details

Recommended Valve : V3-20-6

Load Capacity (Kg) : 3550

Used For : Various

Stud Hole type : B22 DS 36

Type of stud hole : Conic

Wheel Type : BZ

Tubeless : 305/70 R 22.5

CONTACT FOR MORE INFORMATION

Tubeless - Dimensions

KAPAT -

Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
228338	Bus	22.5x8.25	335	281	10	152	26	13



Additional Details

Recommended Valve : V3-20-6

CONTACT FOR MORE INFORMATION



Load Capacity (Kg) : 3550

Used For : Various

Stud Hole type : M22

Type of stud hole : Flat

Wheel Type : MZ

Tubeless : 305/70 R 22.5

CONTACT FOR MORE INFORMATION

Tubeless - Dimensions

KAPAT -

Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
228242 alive	Bus	22.5x8.25	335	281	10	152	26	13



Additional Details

Recommended Valve : V3-22-1

Load Capacity (Kg) : 3650

Used For : Isuzu (Citiport)

Stud Hole type : M22

Type of stud hole : Flat

Wheel Type : MZ


Tubeless : 305/70 R 22.5

CONTACT FOR MORE INFORMATION

Tubeless - Dimensions

KAPAT -

Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
2920805	Bus	22.5x8.25	335	281	10	152	26	13,5



Additional Details



Recommended Valve : V3-22-1

Load Capacity (Kg) : 3550

Used For : Daimler

Stud Hole type : M22

Type of stud hole : Flat

Wheel Type : MZ

Tubeless : 305/70 R 22.5

CONTACT FOR MORE INFORMATION

Tubeless - Dimensions

KAPAT -

Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
228385 alive	Bus	22.5x8.25	335	281	10	151,5	26	13,5



Additional Details

Recommended Valve : V3-22-1

Load Capacity (Kg) : 3650

Used For : UD Truck

Stud Hole type : M22

Type of stud hole : Flat

Wheel Type : MZ

Tubeless : 305/70 R 22.5

CONTACT FOR MORE INFORMATION

Tubeless - Dimensions

KAPAT -

Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
-------------------------	--------------	------	--------------	-------------	-----------	--------	--------------------	----------------

228307	Bus	22.5x8.25	275	221	2	150,5	24	14,5
		Additional Details						
		Recommended Valve : V3-20-6						
		Load Capacity (Kg) : 3550						
		Used For : Various						
		Stud Hole type : M20						
		Type of stud hole : Flat						
		Wheel Type : MZ						
		Tubeless : 305/70 R 22.5						
		CONTACT FOR MORE INFORMATION						

Tubeless - Dimensions								
KAPAT -								
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
227550	Bus	22.5x7.50	335	281	10	153	27	12,5

					Additional Details			
					Recommended Valve : V3-20-6			
					Load Capacity (Kg) : 3250			
					Used For : Daimler			
					Stud Hole type : B22 DS 36			
					Type of stud hole : Conic			
					Wheel Type : BZ			
					Tubeless : 275/80 R 22.5			
					CONTACT FOR MORE INFORMATION			

Tubeless - Dimensions								
KAPAT -								

Tubeless - Dimensions								
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
227627 alive	Bus	22.5x7.50	335	281	10	152,5	26	12,5



Additional Details

Recommended Valve : V3-22-1

Load Capacity (Kg) : 3250

Used For : Daimler

Stud Hole type : M22


Type of stud hole : Flat

Wheel Type : MZ

Tubeless : 275/80 R 22.5

CONTACT FOR MORE INFORMATION

KAPAT -								
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
227683 alive	Bus	22.5x7.50	335	281	10	149	26	13



Additional Details

Recommended Valve : V3-22-1

Load Capacity (Kg) : 3450

Used For : UD Truck

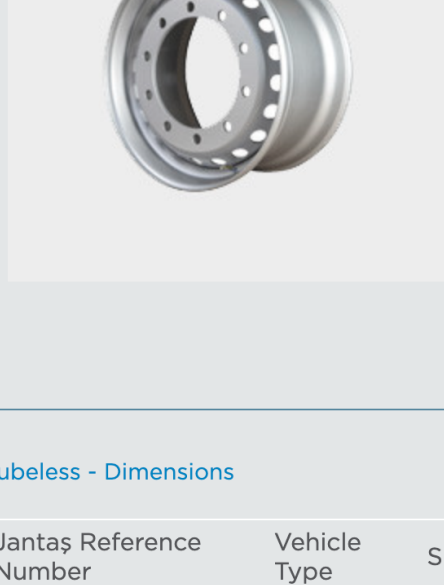
Stud Hole type : M22

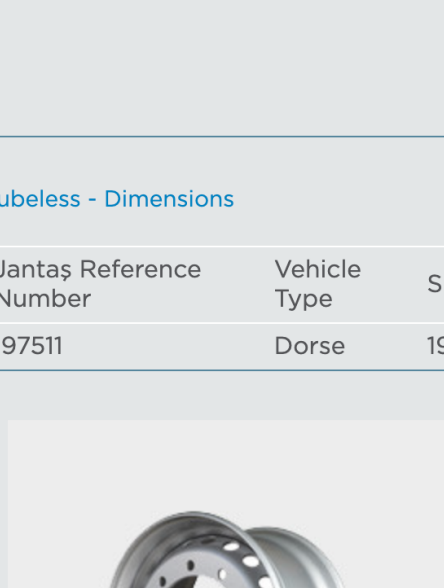
Type of stud hole : Flat

Wheel Type : MZ

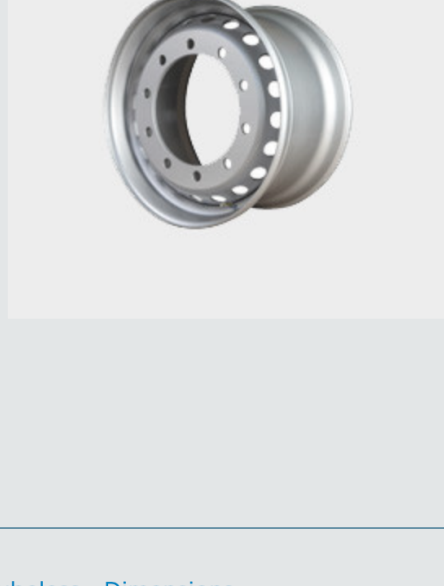
Tubeless : 275/80 R 22.5

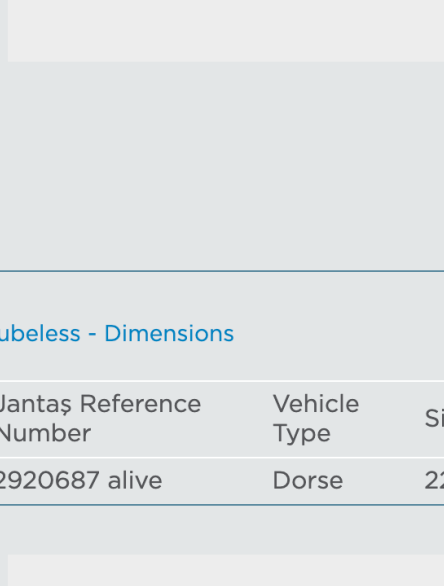
CONTACT FOR MORE INFORMATION

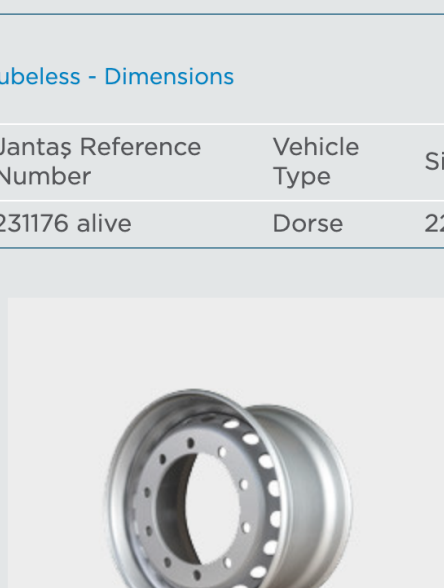
Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
2890138 alive	Dorse	19.5x11.75	335	281	10	120	26	13
					Additional Details			
					Load Capacity (Kg) : 4500			
					Used For : Trailer			
					Stud Hole type : M22			
					Type of stud hole : Flat			
					Wheel Type : MZ			
					Tubeless : 385/65 R 19.5			
CONTACT FOR MORE INFORMATION								

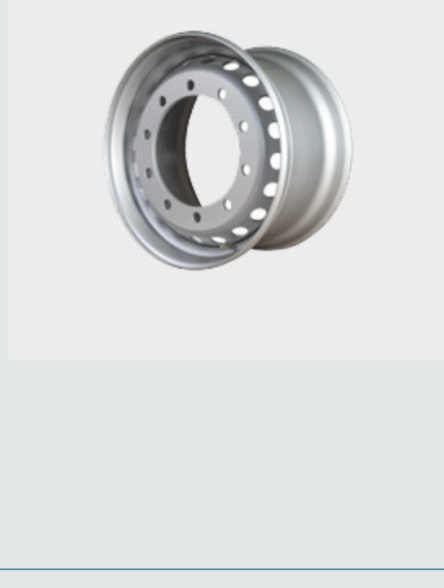
Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
197581	Dorse	19.5x7.50	225	176	10	138,5	26	12,5
					Additional Details			
					Recommended Valve : V3-20-4			
					Load Capacity (Kg) : 2725			
					Used For : Trailer			
					Stud Hole type : M22			
					Type of stud hole : Flat			
					Wheel Type : MZ			
					Tubeless : 285/70 R 19.5			
CONTACT FOR MORE INFORMATION								

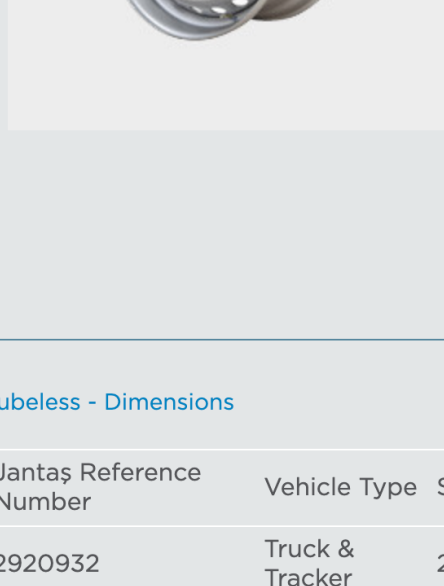
Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
197511	Dorse	19.5x7.50	225	176	10	138,5	24	12,5
					Additional Details			
					Recommended Valve : V3-20-4			
					Load Capacity (Kg) : 2725			
					Used For : Trailer			
					Stud Hole type : M20			
					Type of stud hole : Flat			
					Wheel Type : MZ			
					Tubeless : 285/70 R 19.5			
CONTACT FOR MORE INFORMATION								

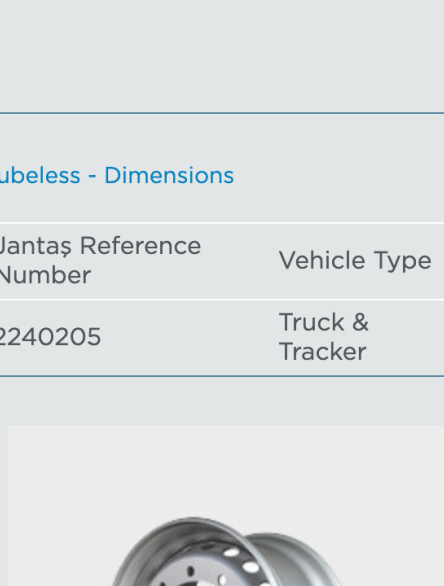
Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
2985900	Dorse	19.5x7.50	225	176	10	138,5	26	12,5
					Additional Details			
					Recommended Valve : V3-20-4			
					Load Capacity (Kg) : 2725			
					Used For : Trailer			
					Stud Hole type : M22 DS 36			
					Type of stud hole : Conic			
					Wheel Type : (MZ)			
					Tubeless : 285/70 R 19.5			
CONTACT FOR MORE INFORMATION								

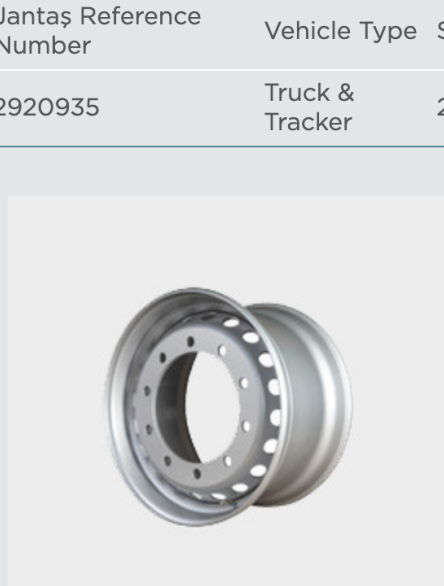
Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
2890116 alive	Truck & Tracker	19.5x7.50	275	221	8	143	24	12
					Additional Details			
					Recommended Valve : V3-22-1			
					Load Capacity (Kg) : 2900			
					Used For : Various			
					Stud Hole type : M20			
					Type of stud hole : Flat			
					Wheel Type : MZ			
					Tubeless : 285/70 R 19.5			
CONTACT FOR MORE INFORMATION								


Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
231195 alive	Dorse	22.5x11.75	275	221	8		24	14
					Additional Details			
					Recommended Valve : V3-22-1			
					Load Capacity (Kg) : 4500			
					Used For : Trailer			
					Stud Hole type : M20			
					Type of stud hole : Flat			
					Wheel Type : MZ			
					Tubeless : 385/65 R 22.5			
CONTACT FOR MORE INFORMATION								

Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
2920687 alive	Dorse	22.5x11.75	335	281	10		26	11,65
					Additional Details			
					Recommended Valve : V3-22-1			
					Load Capacity (Kg) : 5000			
					Used For : Trailer			
					Stud Hole type : M22			
					Type of stud hole : Flat			
					Wheel Type : MZ			
					Tubeless : 385/65 R 22.5			
CONTACT FOR MORE INFORMATION								

Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
231176 alive	Dorse	22.5x11.75	335	281	10	80	26	14
					Additional Details			
					Recommended Valve : V3-22-1			
					Load Capacity (Kg) : 4500			
					Used For : Trailer			
					Stud Hole type : M22			
					Type of stud hole : Flat			
					Wheel Type : MZ			
					Tubeless : 385/65 R 22.5			
CONTACT FOR MORE INFORMATION								

Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
221114 alive	Dorse	22.5x11.75	335	281	10		26	14
					Additional Details			
					Recommended Valve : V3-22-1			
					Load Capacity (Kg) : 5000			
					Used For : Trailer			
					Stud Hole type : M22			
					Type of stud hole : Flat			
					Wheel Type : MZ			
					Tubeless : 385/65 R 22.5			
CONTACT FOR MORE INFORMATION								

Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
2920925	Truck & Tracker	22.5x9.00	335	281	10	161	26	16
					Additional Details			
					Recommended Valve : V3-20-6			
					Load Capacity (Kg) : 6000			
					Used For : Various			
					Stud Hole type : M22			
					Type of stud hole : Flat			
					Wheel Type : (MZ)			
					Tubeless : 315/80 R 22.5			
CONTACT FOR MORE INFORMATION								

Tubeless - Dimensions								KAPAT -
Jantas Reference Number	Vehicle Type	Size	Pitch Circle	Center Bore	Stud Hole	Offset	Stud hole Diameter	Disc Thickness
2920932	Truck & Tracker	22.5x9.00	335	281	10	161	26	16
					Additional Details			
					Recommended Valve : V3-20-6			
					Load Capacity (Kg) : 4500			
					Used For : Various			
					Stud Hole type : M22			
					Type of stud hole : Flat			
					Wheel Type : MZ			
					Tubeless : 315/80 R 22.5			
CONTACT FOR MORE INFORMATION								

||
||
||